


LFL215G51TC1A149

In Production Recommended RoHS REACH

Appearance & Shape

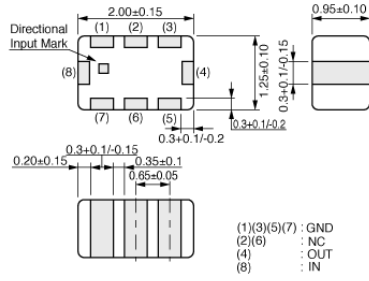

Terminal of "NC" should be fixed to no connected pattern.
* All the technical data and information contained herein are subject to change without prior notice.

(in mm)

Packaging Information

Packaging	Specifications	Minimum Order Quantity
-	180mm Embossed Tape	4000

Features

Ultra-small, low-profiled, lightweight chip filters based on ceramic multilayer technology.

Offering stable high selectivity up to very high frequency.

1. Low loss
2. Ultra-small, low-profiled, lightweight low-pass filters.
3. Ideal for removing high-frequency harmonics at power amplifier and IF stage.
4. Available in tape and reel packings for automatic mounting.
5. Absolutely no adjustment required.
6. Reflow solderable.
7. Center frequencies and responses are ready for customization. Samples are available in a short lead time.

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, its specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

LFL215G51TC1A149



Specifications


Applications	WLAN
Nominal Center Frequency(fo)	5512.00MHz
Bandwidth(BW)	fo±363.00MHz
Insertion Loss in BW I)	0.7dB max. (at 25°C)
Insertion Loss in BW II)	0.9dB max. (-40 to +85°C)
Attenuation(Absolute Value) I)	30dB min. at 2x(fo±363)MHz
Attenuation(Absolute Value) II)	20dB min. at 3x(fo±363)MHz
VSWR(max.)	1.9
Characteristic Impedance(Nom.)	50Ω
Power Capacity	3W
Operating Temperature Range	-40°C to 85°C
L x W (size)	2.00x1.25mm
Thickness(max.)	1.05mm

Attention


- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

LFL215G51TC1A149

Product Data

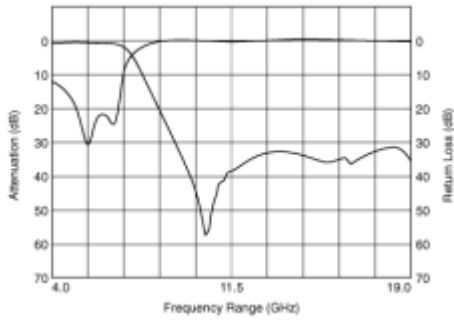

Frequency Characteristics

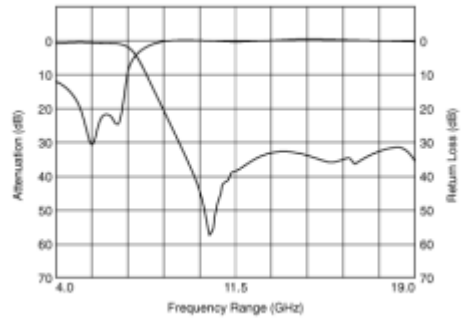

Spurious Response

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.